


V2905H

10G PON+1*10GE+4*GE+1*USB3.0 ONT
(XG-PON or XGS-PON optional.)

Key Features:



10G PON Solution
Realtek Chipset



10GE
High Speed Port



IPv4/IPv6 Dual Stack




USB3.0 Interface

Introduction:

The 10G PON ONT V2905H developed by VSOL supports dual modes including XG-PON/XGS-PON, providing multiple rate Ethernet ports of 10GE/GE. It enables fast and stable networking for multiple devices, ensuring a seamless user experience within homes and effortlessly meeting the demands of 4K/8K, VR, and other services. It offers home and enterprise users an ultimate experience of 10G ultra-high-speed internet connection.

Application Chart:

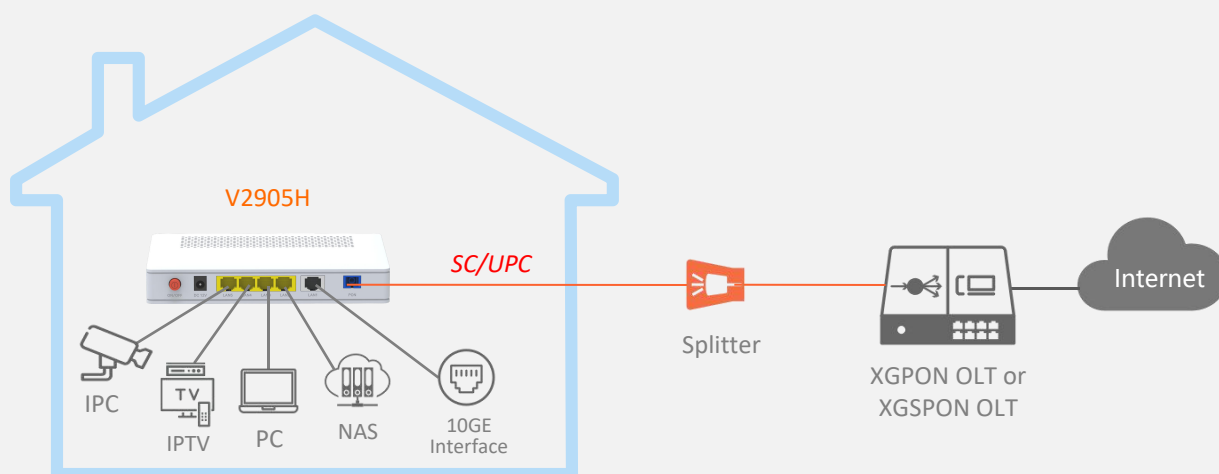

○ Hardware Parameter

Dimension	180mm*120mm*34.5mm (L*W*H)
Operating condition	Operating temp:-10 ~ +55°C Operating humidity:5 ~ 95% (non-condensed)
Storing condition	Storing temp: -40 ~ +70°C Storing humidity: 5 ~ 95% (non-condensed)
Power adapter	12V/1A
Power supply	12W
Interface	1*10GE+4*GE+1*USB3.0
Indicators	PWR, PON, LOS, WAN, LAN1~5, USB

○ Interface parameter

PON Interface	• 10G PON port: Class B+ • SC single mode, SC/UPC connector • TX optical power: 8dBm • RX sensitivity: -29.5dBm • Overload optical power: -7dBm • Transmission distance: 20km • Wavelength: • XG(S)-PON:DS 1577nm/US 1270nm
10G PON layer	• ITU-T G.987(XG-PON) • ITU-T G.9807.1 (XGS-PON)
User interface	• 1*10GE, Auto-negotiation,RJ45 ports • 4*GE, Auto-negotiation,RJ45 ports • 1*USB3.0
USB	1×USB 3.0 for Shared Storage

○ Function Data

O&M	• WEB/TELNET/OAM/OMCI/TR069 • Support private OAM/OMCI protocol and Unified network management of VSOL OLT
Internet connection	Support Bridge/Router mode
Multicast	• IGMP v1/v2/v3, IGMP snooping • MLD v1/v2 snooping
L2	802.1D&802.1ad bridge, 802.1p Cos,802.1Q VLAN
L3	IPv4/IPv6, DHCP Client/Server,PPPoE, NAT, DMZ, DDNS
Firewall	Anti-DDOS, Filtering Based on ACL/MAC /URL

Product Name	Product Description	Accessories
V2905H	1*XG-PON+1*10GE+4*GE+1*USB3.0	AC-DC power adaptor: DC12V / 1A
	1*XGS-PON+1*10GE+4*GE+1*USB3.0	